CONC. COPINGS

AFRICAN THATCH ROOF

SAFETY GLAZING TO ALL WINDOWS, TRIANGLE GABLE GLAZING AND DOORS TO LATEST NBR.STANDARDS

TIMBER WINDOW AND DOOR FRAMES

1000 HIGH TIMBER BALUSTRADES TO NBR STANDARDS

PLASTER AND "EARTHTONE" PAINTED EXTERNAL FINISH

150mm PLASTER SURROUNDS TO OPENINGS

"DRY-PACK-ROCK" CLADDING TO PLINTHS AND CHIMNEY STACKS

NORTH FACADE

1/100

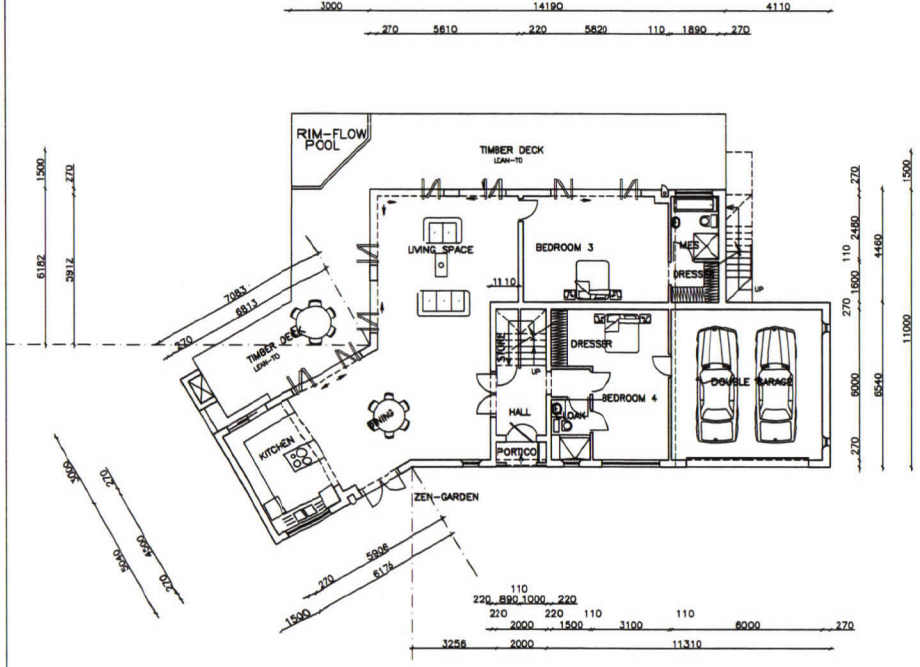

GROUND FLOOR PLAN

1/100

AREA - 212M EXC. DECKS

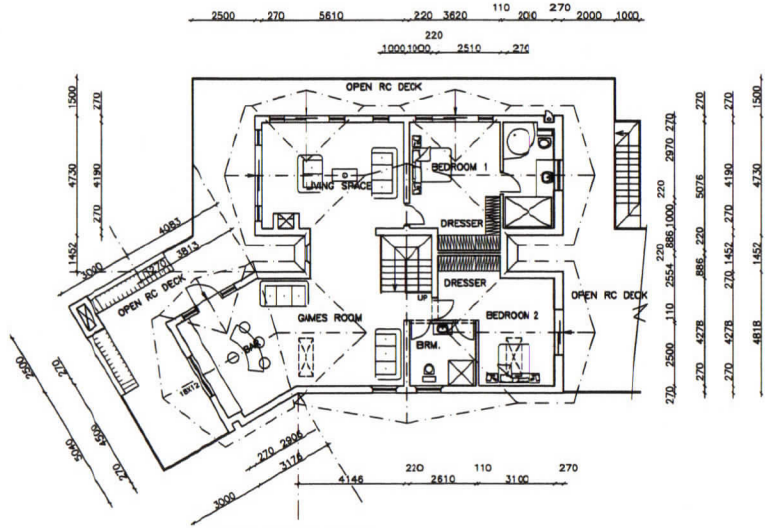

FIRST FLOOR PLAN

1/100

AREA - 142M EXC. DECKS

North

important note

exact position of residence on site, to be confirmed by owner prior to setting-out.

setting out be carried out by an appointed, registered land surveyor.

thickness of wall shown on plan exclude thickness of retaining walls - to be verified by appointed structural engineer.

UNIT TYPE -C-

• KWALANGA ECO-ESTATE •

KWALANGA H.O.A.	ARCHITECTURAL CONTROL OFFICER	OWNER

NOTE

ALL DIMENSIONS + LEVELS GIVEN ON THESE PLANS ARE SUBJECT TO CONFIRMATION ON SITE BY THE ARCHITECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DISCREPANCIES WHICH MAY ARISE AND NO CLAIM FOR EXTRA WORK WILL BE ENTERTAINED UNLESS THE ARCHITECT HAS BEEN NOTIFIED OF ANY DISCREPANCIES PRIOR TO THE COMMENCEMENT OF WORK. IT IS THE RESPONSIBILITY OF THE APPOINTED CONTRACTOR TO ENSURE THE PROTECTION OF ALL REMEDIAL SERVICES DURING CONSTRUCTION.

NOTE: FLOOR COVERINGS AND ELECTRICAL + KITCHEN LAYOUTS TO BE CONFIRMED WITH CLIENT. IT IS THE APPOINTED CONTRACTOR'S RESPONSIBILITY TO ENSURE THE PROTECTION OF ALL MUNICIPAL SERVICES AND REDRAINING PROTECTIVE

ELECTRICAL LEGEND

	CEILING LIGHT POINT
	WALL BRACKET LIGHT POINT
	1.2m FLUORESCENT L-POINT
	SWITCH
	2-WAY SWITCH
	PLUG 300mm HIGH
	PLUG 900mm HIGH
	600mm DIST. BOARD
	HOT WATER CYLINDER
	STOVE POINT
	POOL POINT
	T.V. POINT
	TELEPHONE POINT
	INTERCOM POINT
	BELL

NOTE: FOR ALL RE-INFORCED CONCRETE WORK THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE APPROVED ENGINEER'S DRAWINGS + SPECIFICATIONS.

CONSTRUCTION NOTES

ROOF CONSTRUCTION ROOF TO ENG.SPECS.
45 DEGREE ROOF PITCH, 150MM THICK THATCH ON 38X38 LATTE AT 300 CENTRES ON 125-150 DIA "CLEAR"-TREATED, TURNED GRADE H4 TIMBER POLES AT 750 CENTRES WITH TIE BEAMS TO ENG. SPECS.

ALL TIMBER TO COMPLY WITH CODE 082 OF NBR.

FLOOR CONSTRUCTION - FIRST FLOOR
FINISHES BY CLIENT ON 25 SCREED ON RC FLOOR SLABS TO ENGINEERS SPECIFICATIONS AND DETAILS

ALL GLAZING TO BE IN ACCORDANCE WITH THE LATEST NBR.STANDARDS.
NOTE FOR ALL PURPOSE MADE SAFETY GLAZED UNITS - MANUFACTURER TO MEASURE AS-BUILT OPENINGS ON SITE PRIOR TO ANY MANUFACTURING OF ALUMINIUM UNITS.

FLOOR CONSTRUCTION - GROUND FLOOR
FINISHES BY CLIENT ON 25 SCREED ON 85 CONC. SURFACE BEDS ON DPM ON 50 SANDBED ON 150 LAYERS OF WELL COMPACTED FILLING. PROVIDE REINFORCING MESH UNDER FLOOR TO ENG.SPECS.

DECK CONSTRUCTION - FIRST FLOOR
FINISHES BY CLIENT ON SCREEDS LAYED TO FALLS TO RAINWATER OUTLETS ON RC ROOF SLABS TO ENGINEER'S SPECS.

AMENDMENTS

DATE	NEW NO.

ARCHITECTURAL DESIGNS FOR ALL BUILDING TYPES

BUILDING DESIGNERS

XPAND-A-PLAN

by craig van [illegible]

E.MAIL. xpand[illegible]

[illegible]

CELL: [illegible]

PROJECT

PROPOSED UNIT TYPE -C-

ON SITE NO -

PORTION -1- OF

THE FARM 793

SITUATED IN THE KOUGA MUNICIPAL DISTRICT.

FOR -

DRAWING TITLE
BANK PURPOSES ONLY

DRAWING NO. XAP/0735

DATE 17/07/2007

SHEET NO ONE OF ONE

MUNICIPAL NOTES